

D5901

Compact Digital Conference Host



Description

The compact digital conference host features a 2.0" TFT screen and shuttle knob control, offering subtitle options in Chinese and English. It provides 5 speaking modes, supports up to 6 simultaneous speaking units, and includes extensive connectivity options such as RCA, XLR, and RS232 ports for seamless and efficient meetings.

Features


- With a 2.0" TFT screen and subtitle options in both Chinese and English, together with the shuttle knob for a variety of functions.
- With limit (1/2/3/4/5/6) settings for simultaneous speaking units.
- Support five conference modes: FIFO, FREE, NORMAL, APPLY, and VOICE.
- With volume adjustment for the output signal level.
- Can set a time limit and an end reminder for the timing speaking.
- Can set 3 alert tones for when the unit is pressed.
- With podium mode and priority function for the chairman unit.
- Can adjust the screen saver for energy-saving operation.
- With the option to power on with or without a password.
- Can connect up to 30 D62 series speaking-only units (including chairman units, delegate units, and VIP units).
- With two 8-pin DIN aviation female connectors, connected to conference units.
- Connect and expand multiple units hand in hand with 8-pin aviation plug.
- With an RS232 serial port for seamless connection with the central control system.
- With 2 RCA connectors, unbalanced output, connected to professional amplifiers.
- With 2 XLR connectors, balanced output, connected to professional amplifiers.

Specifications

Model	D5901
Unit Input Sensitivity	38±5mV
Frequency Response	80-15kHz(±3dB)
Total Harmonic Distortion	≤0.5 (80-15k)
S/N Ratio	≥70 (A)dB
Maximum Number of Host Connected Units	30 units (hand-in-hand connection of D62 series speaking-only units)
Package Dimensions (L×W×H) (mm)	535×449×110mm
Machine Dimensions (L×W×H) (mm)	483×293×44mm
Net Weight	2.7KG
Gross Weight	4.2KG

Front / Rear Panel

Front Panel

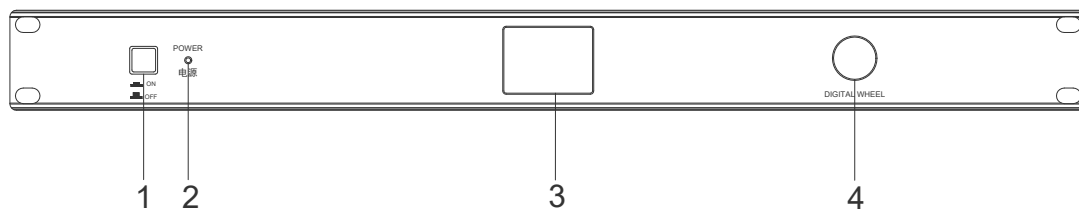

1. **Power Switch**
2. **Power Indicator**

The indicator light is on when the power is turned on and off when the power is turned off.


3. **2.0" TFT Color Screen**

It features a 2.0" TFT screen and subtitle options in both Chinese and English, together with the shuttle knob for a variety of functions.

4. **Shuttle Knob**

Rotate it left or right, or press it to configure the device settings.

Rear Panel

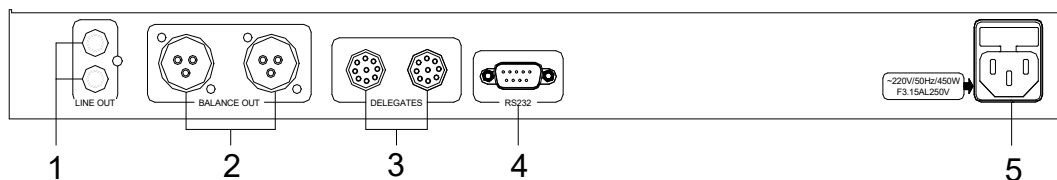

1. **Audio Signal Mixed Output(LINE OUT)**
2. **XLR Balanced Output Connector**
3. **Conference Unit Output Connector**

(DELEGATES1-2, 2 connectors in total) Up to 30 D62 series speaking-only units can be connected.

4. **RS232 Connector**
5. **Power Socket**