

D5921 D5922 Compact Conference Unit



Description

The conference unit is the basic equipment used by participants to engage in and operate the meeting. The conference unit is a passive device powered by the system host, with an input voltage of 24V. It offers ease of use, flexibility, clear audio quality, simple installation, and a stylish and attractive design.

The chairman conference unit features a chairman priority button, a microphone on/off button and an indicator light. Pressing the chairman priority button can mute or turn off the currently speaking units. The chairman's speech is not restricted by the number of speaking units. It has the function of fully controlling the meeting order. In a simple conference system, there can be multiple chairman units with priority speaking rights, and the connection position of the chairman units in the system is not restricted. The LED indicator light shows the current working status.

Features

- Feature a chairman priority button, a microphone on/off button and an indicator light.
- The chairman unit can control the speaking order and manage the meeting atmosphere using the Priority button.
- The conference unit is powered by the system host with a working voltage of DC24V, meeting safety standards.
- Offer ease of use, flexibility, clear audio quality, simple installation, and a stylish and attractive design.


Specifications

Model	D5921 D5922
Frequency Response (±3dB)	100Hz-18KHz
Static Power Consumption	<0.5W
S/N Ratio	>70dB
Crosstalk Attenuation	>75dB
Harmonic Distortion	<0.5%

Input Sensitivity	20mV±5mV
Input Impedance	2ΚΩ
Operating Power	Powered by the host with DC24V
Package Dimensions	485*390*110mm
Gross Weight	2.5kg (2pcs/CTN)


Front / Rear Panel

Front Panel

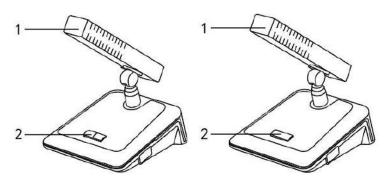

- ① Microphone head: Pick up the speaker's voice and input it into the system for amplification.
- 2 Microphone switch: Turn on or off the microphone (the switch on the chairman unit can also turn off the microphone of the delegate unit).

Rear Panel



① Microphone DIN8 connector.