

## D7235F D7236F

### Discussion Voting Chairman/Delegate Unit Microphone



#### Description

The conference mic integrates the functions of speaking, voting, check-in, self-test, tea application service and two-way intercom. It adopts cardioid directional condenser microphone, built-in internal magnetic speaker, with headset jack, microphone indicator ring and touch button light switch indication, and voice switch in voice mode. It has built-in digital high-speed processor and high-fidelity audio circuit.

#### Features

- Pure speech conference mic.
- With built-in 17 array microphones with high directivity, high sensitivity and high vocal resolution.
- Adopt a multi-point balanced electric flip control system, which can be raised and lowered with one button, and ensure stable, uniform and smooth flipping.
- With MIC button and chairman priority button for fast control and easy operation.
- With a 3.5mm headset output jack on the left side.
- 2 100M RJ45 network interfaces at the bottom of the array mic are connected to the D7201 conference host hand in hand.
- The mic is a passive device, powered by the system host with + 48V PoE.
- The 100M network cable of the array mic is used for audio data transmission, which can communicate with the host.
- Can be combined with other conference mics to form a hybrid system.
- The ordinary conference mic uses a microphone rod and lengthened microphone to pick up the sound,


while the array mic uses a built-in microphone to pick up the sound up to 80CM through special circuit processing, which makes the structure of the array mic more simple and delicate, and the participants can better communicate with each other.

- Available in golden and silver colors.
- Through the host settings, the chairman mic has the priority function (can mute or turn off all delegate mics), and the podium mode (the chairman mic is always on).
- The chairman mic has the permission to approve the application for speaking from the delegate mic.
- The chairman mic can be turned on freely without being restricted by the number of speaking mics.
- The chairman mic has the priority function of fully controlling the conference order.
- The connection position of the chairman mic is not restricted.

## Specifications

Model	D7235F D7236F
Frequency Response	80Hz-16KHz ( $\leq \pm 3\text{dB}$ )
MIC Directivity	Directional broadband
MIC Sensitivity	200mV/Pa
SNR	$\geq 71\text{dB}$
Dynamic Range	$\geq 20\text{dB}$
THD	$\leq 1\%$
Maximum Power Consumption	2.4W
Hand-in-hand Connection Line	Network Cable
Color	Golden/Silver
Installation	Flip-up mic embedded in the desktop, with distance between the mic and the desktop edge of $\leq 0.55\text{m}$
Package Dimensions (W×D×H)	395×160×205
Machine Dimensions (W×D×H)	350×115×132
Desktop Counterbore Size	351×116×3mm
Desktop Opening Size	335×100mm
Gross Weight (Kg)	3.65
Net Weight (Kg)	2.65

# Front / Rear Panel

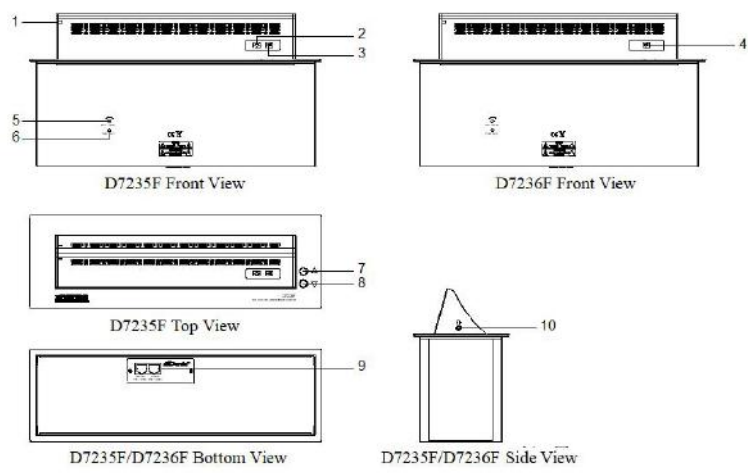

- (1) POWER Indicator.
- (3) MIC Button and Indicator of Chairman MIC and Indicator of Delegate Speech MIC.
- (5) MIC GIAN Knob.
- (7) UP Button.
- (9) 100M +48V Power Supply RJ45 Network Interface.

- (2) Chairman Priority Button and Indicator.
- (4) MIC Button / Speech Application Button
- (6) EAR VOL Knob.
- (8) DOWN Button.
- (10) 3.5 Headset OUT.